


# IKVM-1408 *19" 1U Rackmount 8 port KVM switch*

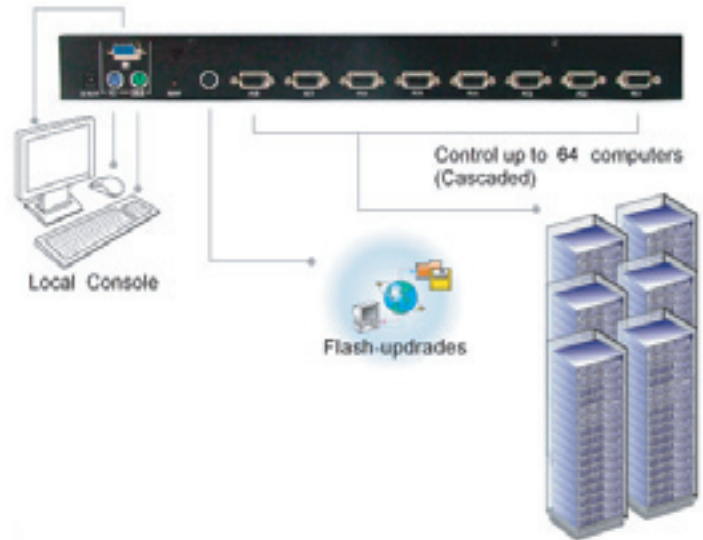

## Main Features

1. Access and control of 8 servers directly from a single PS/2 console
2. Multi Bank installation (Cascading) - centralized control up to 64 servers
3. Hot Keys or Direct access push button on switch
4. Quick computer selection via intelligent On Screen Display (OSD)

## Specifications

Computer connection	Direct 8
Cascading	64 unit
Selection Buttons	8
Port LEDs (Twin Color)	8
Port Selection	OSD / Hot Key / Push Bottom
Keyboard/ Mouse/ VGA	8 sets:HDDB15 pin Female,embedded keyboard, mouse, VGA
Console ports	PS/2 keyboard;PS/2 mouse; VGA
Monitor	1 set;HDDB 15 pin Female
Keyboard	1 set;PS/2 6 pin mini DIN Female
Mouse	1 set;PS/2 6 pin mini DIN Female
Resolution	1280 x 1024
Dimension(mm)	440(W) x 165(D) x 40(H)
Weight	2 kgs
Enclosure	Metal
Flash upgrade port	Firmware upgradeable via MiniDin 8 pin
Power supply	DC 9V, 600mA Adapter
Operation temperature	0-40°C
Storage temperature	-20-60°C
Humidity	0-80% RH,non-condensing

## Packing List

- 1 x IKVM-1408
- 1 x QIG (quick installation guide)
- 1 x IKVM-CBS18-RS
- 1 x External Power Adapter, DC 12V@4A

## Optional Accessories

- IKVM-CBS18-RS** 1.8M KVM Cable,DB-15Msa15M.2XMD-6M, RoHS
- IKVM-CBS30-RS** 3M KVM Cable,DB-15Msa15M.2XMD-6M, RoHS
- IKVM-CBS48-RS** 4.8M KVM Cable,DB-15Msa15M.2XMD-6M, RoHS

## Ordering Information

- IKVM-1408-US  
8 port 1U Rackmount KVM switch with PS/2 Keyboard and mouse, US adapter
- IKVM-1408-EU  
8 port 1U Rackmount KVM switch with PS/2 Keyboard and mouse, EU adapter



● IKVM-CBS Cable

- 1 Single Board Computer
- 2 VIDEO CARD
- 3 Xscale Solutions
- 4 Open HMI
- 5 VITO Universal Controller
- 6 DINO BLADE
- 7 LCD Product Series
- 8 Embedded System
- 9 Industrial Computer Chassis
- 10 Power Supply
- 11 Peripherals